



PRODUCT INFORMATION

MEASUREMENTS


	Length	Width	Depth	Weight
24W	1000mm	65mm	91mm	4.5kg
LIGHT SOURCE	Osram High Power LED			
HOUSING	Aluminium alloy and adjustable mounting brackets			
BRACKET MATERIAL	ST12			
FRAME COLOUR	Silver, Black			
IP RATING	IP66			
OPERATING TEMP	-40°C to 55°C			

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	90-305VAC, 50/60Hz or 24VDC
LIFESPAN	50,000 hours
POWER	24W
BEAM ANGLE	60E° (Elongated), 50E° (Elongated), 30°
CCT	5,000-5,500K Cool White 4,000-4,500K Natural White 2,700-3,000K Warm White Red, Green or Blue

* FIGURES REPRESENTED IN LUMEN OUTPUT TABLE BELOW AT 2,700K

SCHEMATIC OF LINEAR 24W

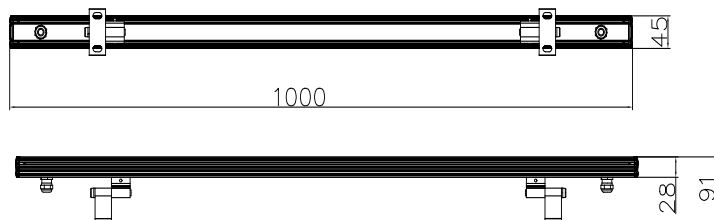


OUTPUT


	WARM WHITE
24W	2,040 lm

DISTRIBUTION DIAGRAMS


60E° (Elongated)



50E° (Elongated)



30°



PRODUCT CODE BUILDER

E.G. NEBULA-L18WLV-30-CWB

PRODUCT CODE	POWER	VOLTAGE	BEAM ANGLE	CCT	TRIM
NEBULA-L	24W	LV (24VDC)	-60E	-WW (WarmWhite)	S (Silver)
			-50E	-NW (Natural White)	B (Black)
			-30	-CW (Cool White)	

