

# CoronaBL™ Cyanosis

RECTANGULAR MEDICAL BACKLIT PANEL LIGHTS



## PRODUCT INFORMATION

<b>MEASUREMENTS</b>	<b>LENGTH</b>	<b>WIDTH</b>	<b>HEIGHT</b>
	1195mm	295mm	30mm
<b>LIGHT SOURCE</b>	2835 SMD		
<b>LENS</b>	Frosted PC or Prismatic (Low Glare)		
<b>HOUSING</b>	Aluminum alloy frame with steel backboard		
<b>MOUNTING</b>	Default - Mount in T-Bar ceiling grid Recessed with Plaster Frame Kit or Box Frame.		
<b>TRIM</b>	White		
<b>OPERATING TEMPERATURE</b>	-20°C to +45°C		


## TECHNICAL SPECIFICATIONS

<b>INPUT VOLTAGE</b>	220~240VAC
<b>DIMMABLE</b>	0-10V, DALI or Tridonic
<b>LIFESPAN</b>	50,000 hours (to L70)
<b>POWER</b>	25W, 30W, 40W
<b>BEAM ANGLE</b>	110°
<b>CRI</b>	90
<b>CCT</b>	~3,970K Natural White
<b>COI</b>	1.0

\* CYANOSIS OBSERVATION INDEX (NATA LABORATORY CERTIFIED TO AS/NZS 1680.2.5:1997)

BEAM ANGLE = 110°


### Luminous Intensity Distribution Curve(cd/klm)

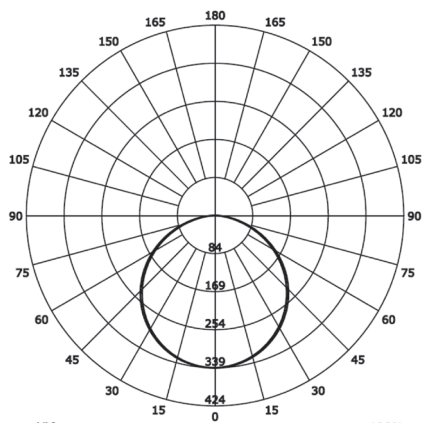

### OUTPUT Natural White

25 W	3,625lm
30 W	3,750lm
40 W	4,000lm

### SCHEMATIC OF CORONABL-1200R-CY

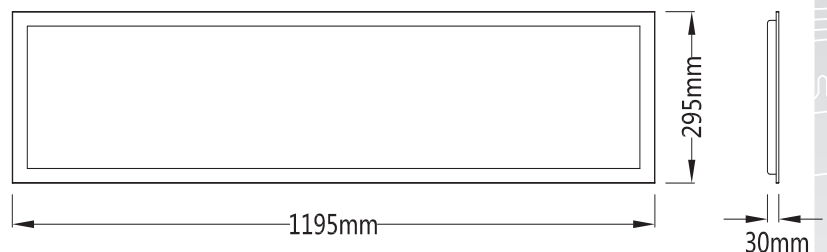

### PRODUCT CODE BUILDER

E.G. CoronaBL-1200R-CY-W-NW plus Corona-DriverFFT-30W-ND

PRODUCT	LENGTH	LENS	CYANOSIS	TRIM	CCT	POWER (Designated by LED Driver)
CoronaBL	1200R	'Blank' (Standard) 'P' (Prismatic)	CY	- W (White)	NW (Natural White)	25W 30W 40W

### DRIVER & POWER OPTIONS

- DriverFF Tridonic (NonDim) 30W, 40W
- Driver-Dim (0-10V) 30W, 40W
- Driver-DALI 25W, 40W