


# CoronaBL™ Rectangular

ULTRA SLIM BACKLIT PANEL LIGHTS

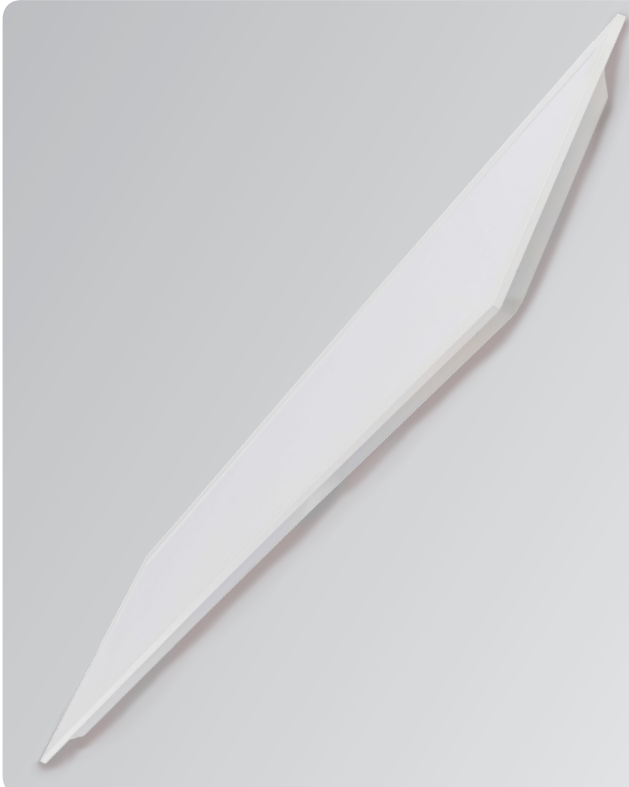

## PRODUCT INFORMATION

<b>MEASUREMENTS</b>	LENGTH	WIDTH	DEPTH
	1,195mm	295mm	30mm
<b>LIGHT SOURCE</b>	2835 SMD		
<b>LENS</b>	Frosted PC or Prismatic (Low Glare)		
<b>HOUSING</b>	Aluminum alloy frame with steel backboard		
<b>MOUNTING</b>	Default - Mount in T-Bar ceiling grid Recessed with Plaster Frame Kit, Box Frame.		
<b>TRIM</b>	White		
<b>OPERATING TEMPERATURE</b>	-20°C to +45°C		


## TECHNICAL SPECIFICATIONS

<b>INPUT VOLTAGE</b>	220~240VAC
<b>DIMMABLE</b>	0-10V, DALI or Tridonic
<b>LIFESPAN</b>	50,000 hours (to L70)
<b>POWER</b>	25W, 30W, 40W
<b>UGR</b>	22 or >19 (Prismatic Lens)
<b>BEAM ANGLE</b>	110°
<b>CRI</b>	80
<b>CCT</b>	4,000K Natural White

Note: Options for 3,000K Warm White, 5,000K Cool White or Prismatic (Low Glare) are available for projects that meet MOQ's.


BEAM ANGLE = 110°

Luminous Intensity Distribution Curve(cd/klm)

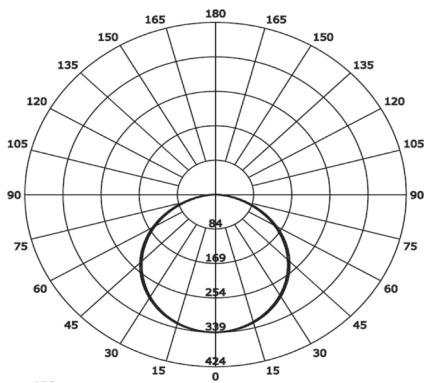

Unit: cd  
 c0/180 : PRISMATIC  
 c90/270 : STANDARD

## SCHEMATIC OF CORONA-1200R

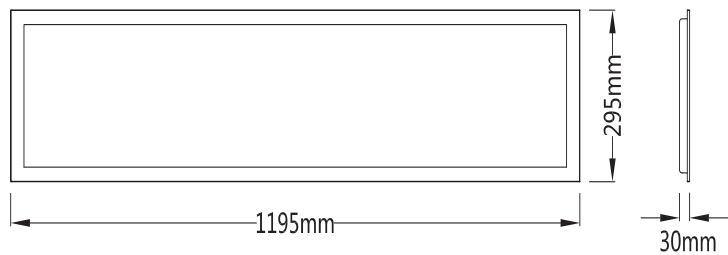

## PRODUCT CODE BUILDER

E.G. CoronaBL-1200R-W-NW plus Corona-DriverFFT-30W-ND

PRODUCT	LENGTH	WIDTH	LENS	TRIM	CCT	POWER (Designated by LED Driver)
CoronaBL	- 1200	R(300)	"Blank" (Frosted) - W (White) "P" (Prismatic)		NW (Natural White)	25W 30W 40W

## DRIVER & POWER OPTIONS

- DriverFF Tridonic (NonDim) 30W, 40W,
- Driver-Dim (0-10V) 30W, 40W,
- Driver-DALI 25W, 40W, 60W