

CoronaBLTM Square

ULTRA SLIM BACKLIT PANEL LIGHTS



PRODUCT INFORMATION

MEASUREMENTS	LENGTH	WIDTH	DEPTH
	595mm	595mm	30mm
LIGHT SOURCE	2835 SMD LEDs		
LENS	Frosted PC or Prismatic (Low Glare)		
HOUSING	Aluminum alloy frame with steel backboard		
MOUNTING	Default - Mount in T-Bar ceiling grid Recessed with Plaster Frame Kit or Box Frame.		
TRIM	White		
OPERATING TEMPERATURE	-20°C to +45°C		


TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	220~240VAC
DIMMABLE	0-10V, DALI or Tridonic
LIFESPAN	50,000 hours (to L70 B10)
POWER	25W, 30W, 40W,
UGR	22 or >19 (Prismatic)
BEAM ANGLE	110°
CRI	80
CCT	4,000K Natural White


Note: Options for 3,000K Warm White, 5,000K Cool White or Prismatic (Low Glare) are available for projects that meet MOQ's.

BEAM ANGLE = 110°

Luminous Intensity Distribution Curve(cd/klm)

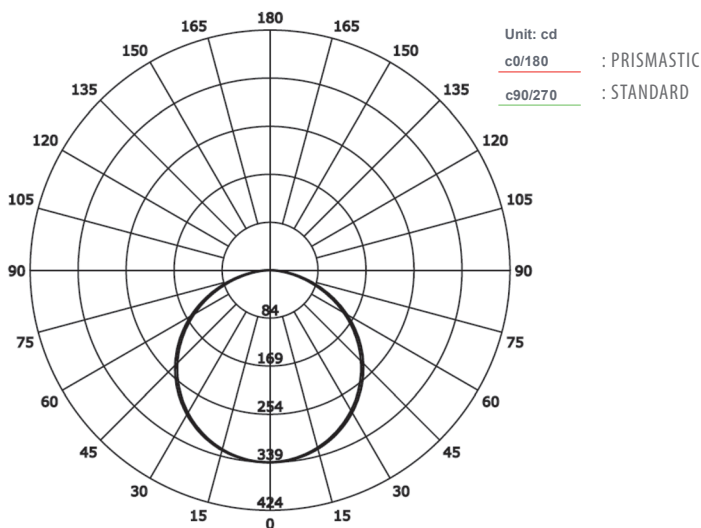

SCHEMATIC OF CORONABL-600S

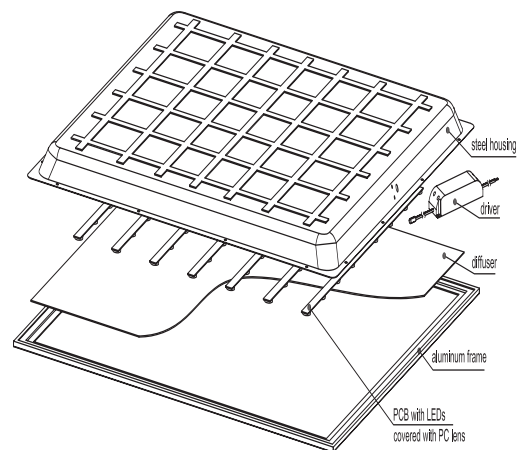

E.G. CoronaBL-600S-W-NW plus CoronaBL-DriverFFT-30W-ND

PRODUCT	LENGTH	LENS	TRIM	CCT	POWER (Designated by LED Driver)
CoronaBL	- 600S	"Blank" (Frosted) - W (White) 'P" (Prismatic)	- W (White)	NW (Natural White)	25W 30W 40W

DRIVER & POWER OPTIONS

- DriverFF Tridonic (NonDim) 30W, 40W
- Driver-Dim (0-10V) 30W, 40W
- Driver-DALI 25W, 40W