

Corona™ Rectangular

ULTRA SLIM PANEL LIGHT LOW UGR




PRODUCT INFORMATION

MEASUREMENTS	LENGTH	WIDTH	DEPTH
WEIGHT	1,195	295	9mm
LIGHT SOURCE	JuFei Optoelectronic		
LENS	Prismatic		
HOUSING	Aluminium alloy		
MOUNTING	Default - mount in T-Bar ceiling grid Recessed with Plaster Frame Kit, Suspended, Hard Surface, Box Frame.		
TRIM	White		
OPERATING TEMPERATURE	-20°C to +45°C		

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	110VAC 60Hz, 230VAC 50Hz
DIMMABLE	0-10V/PWM or DALI
LIFESPAN	50,000 hours
POWER	26W & 40W
UGR	19
BEAM ANGLE	120°
CRI	>80
CCT	4,000K Natural White

BEAM ANGLE = 120°

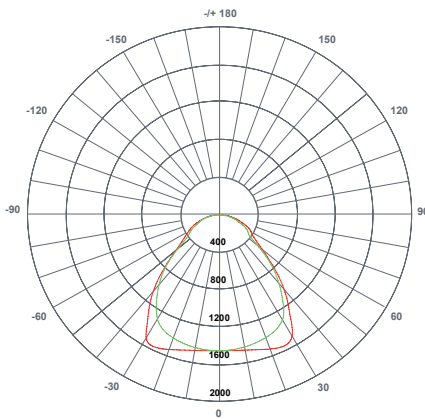

Unit: cd
c0/180 : PRISMATIC
c90/270 : STANDARD

OUTPUT

	Natural
	White
26W	2,764lm
40W	3,730lm

SCHEMATIC OF CORONA-1200RSP



PRODUCT CODE BUILDER

E.G. CORONA-1200RSP plus Corona-Driver-26W-N-ND

PRODUCT RANGE	LENGTH (MM)	WIDTH (MM)	LENS	TRIM	POWER	CCT	DIMMING
Corona	- 1200	RS(300)	P (Prismatic)	- W (White)	26W 40W	N (Natural White)	- ND (Non Dim) - D (0-10V/PWM) - DD (DALI)