
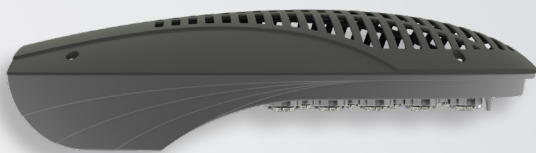


Polaris™ Pole Mount

LIGHT WEIGHT POLE MOUNT LED

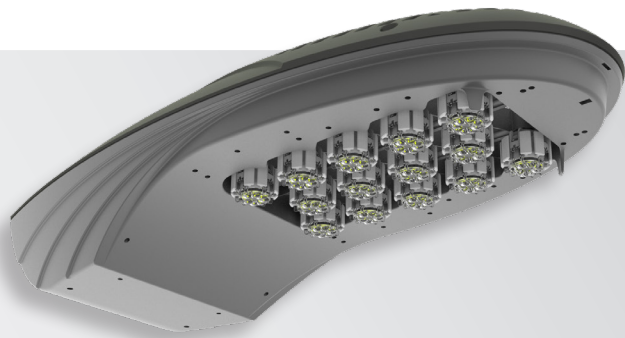

PRODUCT INFORMATION


WEIGHT RANGE	1.2kg
LIGHT SOURCE	Nichia High Power LED
LENS	Ceramic Pixel
HOUSING	UV Stabilised Plastic
FRAME COLOUR	Silver, White, Bronze
MECHANICAL IMPACT RESISTANCE	IK08
IP RATING	IP66
OPERATING TEMP	-40°C to 55°C

TECHNICAL SPECIFICATIONS


INPUT VOLTAGE	100-240VAC, 50/60Hz or 24VDC
DIMMABLE	Non Dimmable
LIFESPAN	50,000 hours to L70
POWER	20W, 30W, 35W, 40W
BEAM ANGLES	LJ25 - 130°-85° LJ31 - 144°-72° LJ32 - 152°-82° LJ33 - 140°-106°
LUMINOUS EFFICACY	130lm/W post optics
CCT	5,000K Cool White* 4,000K Natural White 3,000K Warm White

* FIGURES REPRESENTED IN LUMEN OUTPUT TABLE BELOW AT 5,000K


SCHEMATIC OF POLE MOUNT

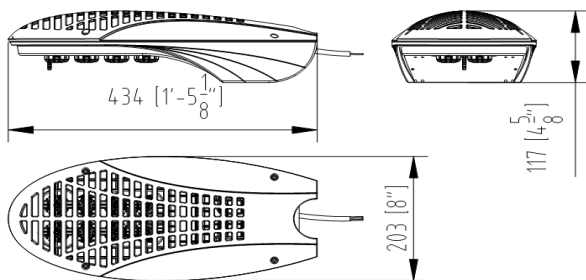

BEAM ANGLES

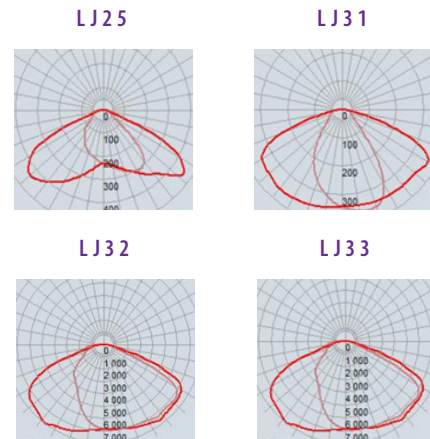

TYPICAL APPLICATIONS

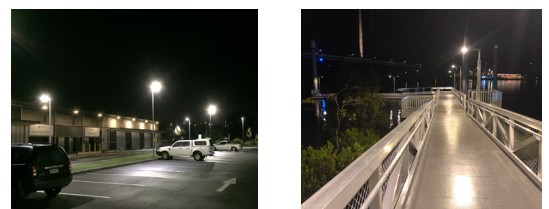

PRODUCT CODE	POWER	OUTPUT* (LUMENS)	LENGTH (MM)	WIDTH (MM)	DEPTH (MM)
PolarisPM-20W	20W	2,600	434	203	117
PolarisPM-30W	30W	3,900	434	203	117
PolarisPM-35W	35W	4,550	434	203	117
PolarisPM-40W	40W	5,200	434	203	117